
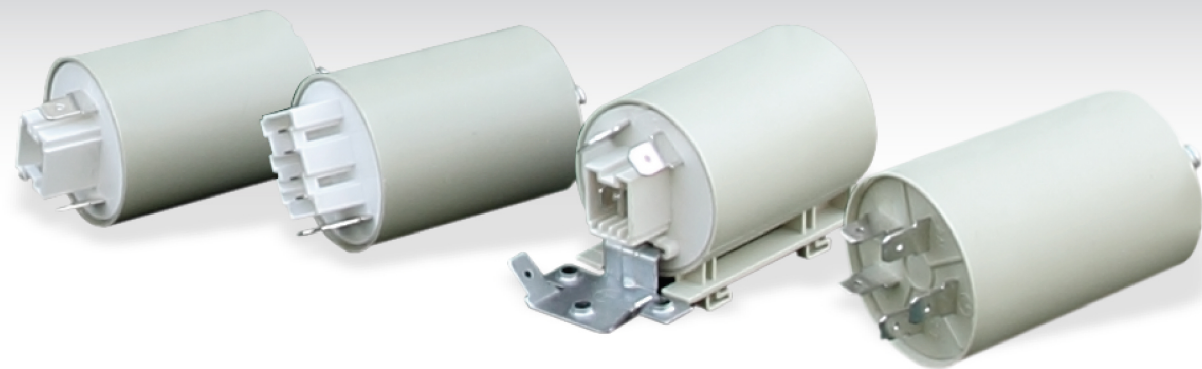


LCR 095 / 01

White Goods General Purpose Filters

白色家电通用型电源滤波器

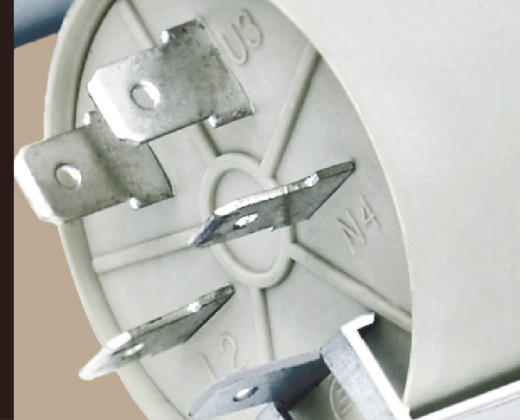

LCR 095/01 Series/系列

Features/特点



White goods general purpose filters.
白色家电通用型电源滤波器

Typical Applications/应用范围

Washing machine, refrigerator, air conditioner and other appliances.
洗衣机, 电冰箱, 空调和其它的一些电器设备

Technical Data/技术参数


Rated Voltage Max. (V) 最高额定电压	250VAC	Leakage Current 095/01 Series 095/01系列 漏电流	
Rated Current (A) 额定电流	4 - 16A @ 40°C	@250 VAC 50Hz	0.89mA Max. / 1.89mA Max.
Operating Frequency (Hz) 工作频率	50 / 60Hz	@115 VAC 60Hz	0.49mA Max. / 1.05mA Max.
Hipot Rating 高压等级		IP Class 防尘防水等级	IP53
(Line to Line 线对线)	1450V DC	Climatic category 气候类别 (EN60068-1)	25/100/21
(Line to Ground 线对地)	2250V DC	Packaging Quantity 包装数量	125 Pcs per carton
Case 外壳	Plastic Resin		

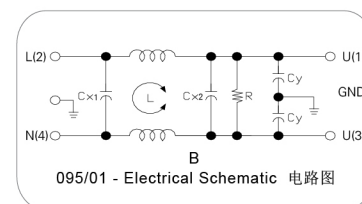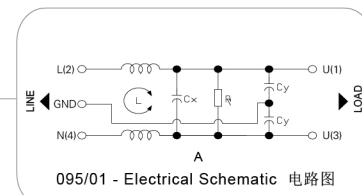

095/01 Model No. 型号	Rated Current @ 40°C 额定电流	L Mh	Cx1 uF	Cx2 uF	Cy nF	R Ω	Schematic 电路图	Mechanical Diagram 外形图	Unit Weight 单重 (g)	Terminal Options 连接方式
										In 入 Out 出
095.11003.00A	10A	3	NA	0.47	4.7	680K	A	A	95	Faston 6.35*0.8 Faston 6.35*0.8
095.11006.00C	10A	1	NA	0.47	25	680K	A	C	95	Faston 6.35*0.8 Faston 6.35*0.8
095.11007.00C	10A	0.5	NA	0.47	10	680K	A	C	95	Faston 6.35*0.8 Faston 6.35*0.8
095.11208.00F	12A	0.47	NA	0.47	10	680K	A	F	100	Faston 6.35*0.8 Faston 6.35*0.8
095.11209.00F	12A	1.75	NA	0.47	25	680K	A	F	100	Faston 6.35*0.8 Faston 6.35*0.8
095.11606.00E	16A	1.5	0.68	0.47	10	2.2M	B	E	100	Faston 6.35*0.8 Faston 6.35*0.8
095.11605.00A	16A	1	NA	0.47	10	680K	A	A	95	Faston 6.35*0.8 Faston 6.35*0.8
095.11612.00E	16A	1.5	0.47	0.47	10	680K	B	E	100	Faston 6.35*0.8 Faston 6.35*0.8
095.11613.00D	16A	1	NA	0.47	10	680K	A	D	100	Faston 6.35*0.8 Faston 6.35*0.8
095.11615.00A	16A	1	NA	0.47	10	680K	A	A	100	Faston 6.35*0.8 Faston 6.35*0.8
095.11616.00F	16A	1	NA	0.33	10	680K	A	F	95	Faston 6.35*0.8 Faston 6.35*0.8


☆ Please mark terminals type at the end of the P/N when order or inquiry /请在订单或询价单上注明端子类型

LCR 095/01 Mechanical Outlines/外形图

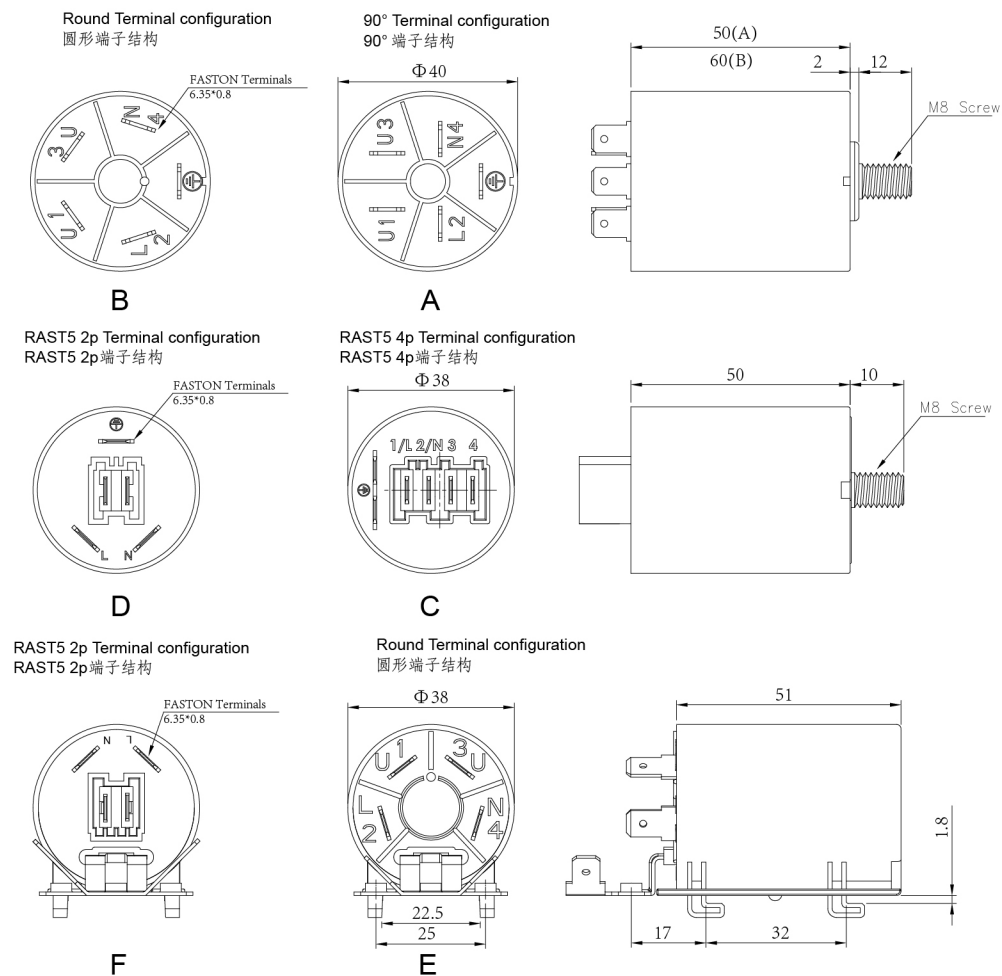

LCR 095/01 Insertion Loss in dB measured in a 50Ω system /50 Ω环境下插入损耗

— Common Mode ---- Differential Mode

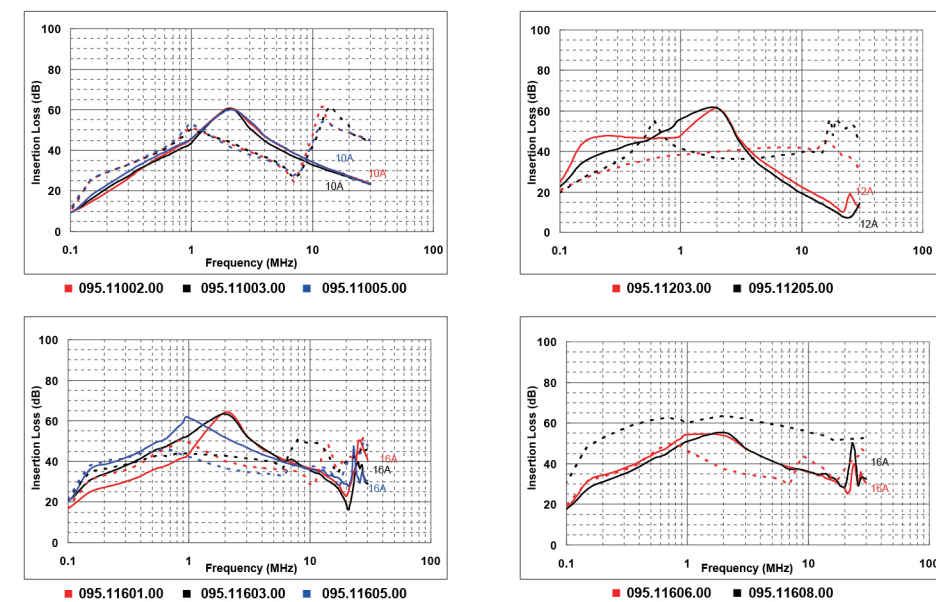

☆ Other specifications, requirements and customizations can be offered upon request / 其它规格可以根据您的要求定做